

# BPK-RF plastic blank plates

pluggable / IP54 / UL Type 12



BPK Blank plates seal cut-outs for standard 10-pole / 16-pole / 24-pole industrial connectors with IP rating IP54.

Blank plates are plugged into cut-outs (wall thickness from 1.5 to 3 mm).

IP54

UL TYPE  
12

UL  
US

RoHS  
compliant

REACH  
COMPLIANCE

Made in  
Germany

## Specifications

IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Polypropylene Integrated sealing lip: Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 110 C°
Properties	silicone free, halogen free
Mounting options	Snap-in

## Advantages & benefits

- Fast mounting by snapping into the cut-out
- Integrated gasket

## Product types & sizes

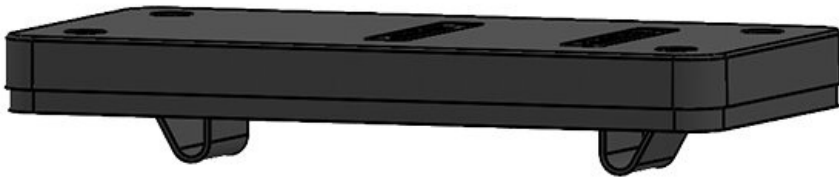
BPK 24-RF A

Part No.	<b>42024.002</b>	For min. wall thickness	<b>1,5 mm</b>
EAN	<b>4251269307522</b>	For max. wall thickness	<b>3 mm</b>
Package quantity	<b>10</b>		
Length	<b>148 mm</b>		
Width	<b>53 mm</b>		
Height	<b>10,3 mm</b>		
Cut-out size	<b>112 × 36 mm</b>		

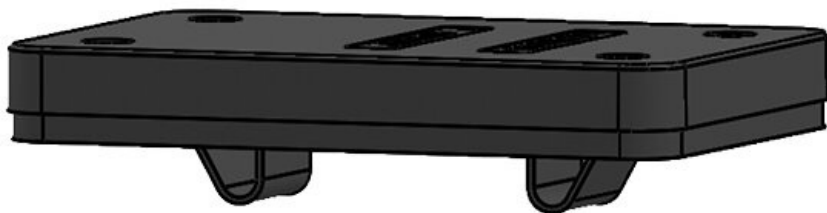


**BPK 16-RF A**

Part No.	<b>42016.002</b>	For min. wall thickness	<b>1,5 mm</b>
EAN	<b>4251269307485</b>	For max. wall thickness	<b>3 mm</b>
Package quantity	<b>10</b>		
Length	<b>121 mm</b>		
Width	<b>53 mm</b>		
Height	<b>10,3 mm</b>		
Cut-out size	<b>86 x 36 mm</b>		

**BPK 10-RF A**

Part No.	<b>42015.002</b>	For min. wall thickness	<b>1,5 mm</b>
EAN	<b>4251269307461</b>	For max. wall thickness	<b>3 mm</b>
Package quantity	<b>10</b>		
Length	<b>101 mm</b>		
Width	<b>53 mm</b>		
Height	<b>10,3 mm</b>		
Cut-out size	<b>65 x 36 mm</b>		

**BPK-B-RF A**

Part No.	<b>42010.002</b>	For min. wall thickness	<b>1,5 mm</b>
EAN	<b>4251269307409</b>	For max. wall thickness	<b>3 mm</b>
Package quantity	<b>10</b>		
Length	<b>76 mm</b>		
Width	<b>53 mm</b>		
Height	<b>10,3 mm</b>		
Cut-out size	<b>46 x 46 mm</b>		

