

BPK-RF plastic blank plates

pluggable / IP54 / UL Type 12



IP54

UL TYPE
12

UL
US

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany

BPK Blank plates seal cut-outs for standard 10-pole / 16-pole / 24-pole industrial connectors with IP rating IP54.

Blank plates are plugged into cut-outs (wall thickness from 1.5 to 3 mm).

Specifications

IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Polypropylene Integrated sealing lip: Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 110 C°
Properties	silicone free, halogen free
Mounting options	Snap-in

Advantages & Benefits

- Fast mounting by snapping into the cut-out
- Integrated gasket

Product types & Sizes

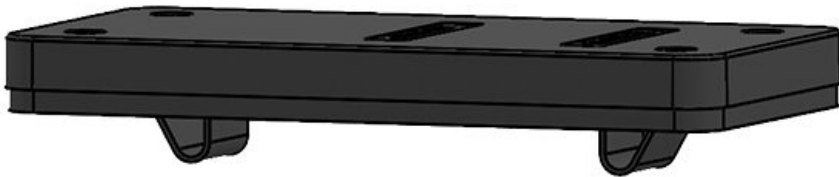
BPK 24-RF A

Part No.	42024.002	For min. wall thickness	1,5 mm
EAN	4251269307522	For max. wall thickness	3 mm
Package quantity	10		
Length	148 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	112 × 36 mm		

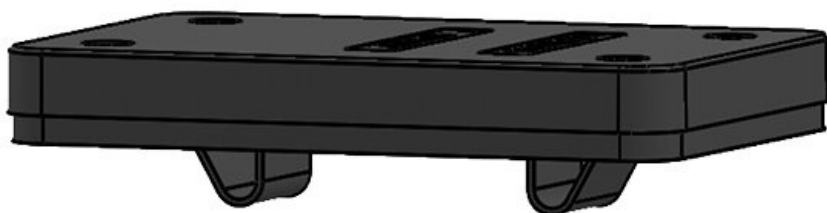


BPK 16-RF A

Part No.	42016.002	For min. wall thickness	1,5 mm
EAN	4251269307485	For max. wall thickness	3 mm
Package quantity	10		
Length	121 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	86 x 36 mm		

BPK 10-RF A

Part No.	42015.002	For min. wall thickness	1,5 mm
EAN	4251269307461	For max. wall thickness	3 mm
Package quantity	10		
Length	101 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	65 x 36 mm		

BPK-B-RF A

Part No.	42010.002	For min. wall thickness	1,5 mm
EAN	4251269307409	For max. wall thickness	3 mm
Package quantity	10		
Length	76 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	46 x 46 mm		

