

BPK-RF 10-pole 16-pole 24-pole

IP54 / IP54 / UL Type 12



10-pole / 16-pole / 24-pole 1.5 - 3 mm wire terminals. (IP54)
 BPK-RF A : 1.5 - 3 mm wire terminals

IP54

UL TYPE 12

UL US

RoHS compliant

REACH COMPLIANCE

Made in Germany

10 16 24

1.5 mm 3 mm

가이드

IP (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
	10-pole, 16-pole, 24-pole
	UL94-V0, flame retardant
	-30 C° to 110 C°
	1.5 mm, 3 mm
10 16 24	1.5 - 3 mm

10 16 24

BPK 24-RF A

EAN	42024.002	10 16 24	1,5 mm
	4251269307	10 16 24	3 mm
	522		
	10		
	148 mm		
	53 mm		
	10,3 mm		
10 16 24	112 x 36 mm		




BPK 16-RF A

EAN **42016.002** □□ □□ **1,5 mm**
4251269307 □□ □□ **3 mm**
485
10
121 mm
53 mm
10,3 mm
□□ □□ **86 × 36 mm**



BPK 10-RF A

EAN **42015.002** □□ □□ **1,5 mm**
4251269307 □□ □□ **3 mm**
461
10
101 mm
53 mm
10,3 mm
□□ □□ **65 × 36 mm**

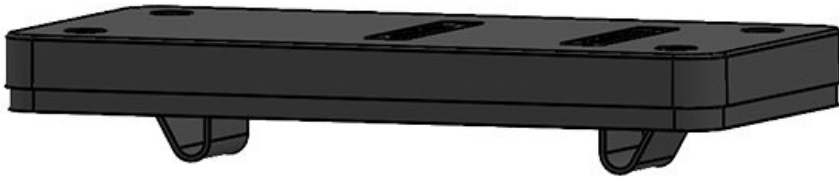

BPK-B-RF A

EAN **42010.002** □□ □□ **1,5 mm**
4251269307 □□ □□ **3 mm**
409
10
76 mm
53 mm
10,3 mm
□□ □□ **46 × 46 mm**

