


KVT-SNAP | 4-Port 16-Pin 5mm Pitch

4-Port 16-Pin, M32 - M63 / IP54

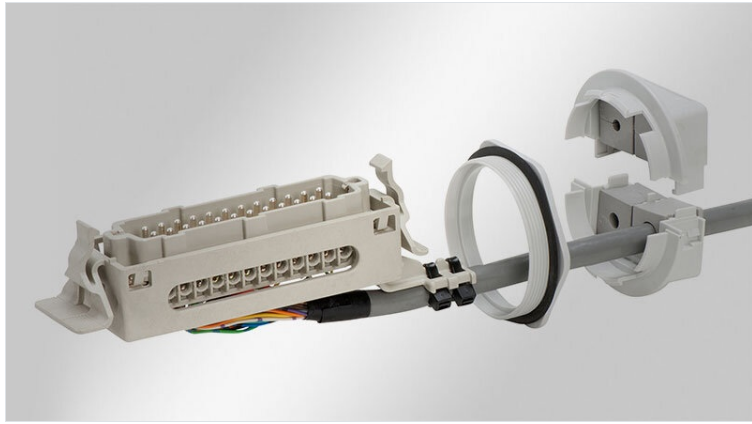

KVT-SNAP is a 4-port, 16-pin connector with a 5mm pitch. It is designed for high reliability and is suitable for use in industrial environments. The connector is made of high-quality plastic and is resistant to dust and moisture.

KVT-SNAP has a 5mm pitch between pins and a 16-pin configuration.

It is suitable for use in industrial environments.

Key features:

High reliability and long service life (industrial grade)

Compatible with standard pneumatic cables (KVT) and other compatible cables.



IP Rating (EN 60529)	IP54
Material	UL94-V0, Plastic
Temperature Range	-30 C° to 100 C°
Dimensions	40 mm x 21 mm x 11 mm
Weight	0.05 kg


Color Options

- 4-Port 16-Pin 5mm Pitch
- Industrial Grade
- High Reliability
- Suitable for Industrial Use
- Long Service Life
- Compatible with Standard Pneumatic Cables (KVT)
- Available in Various Colors

Product Variants

Model	Dimensions	Weight	Material	Notes
KVT-SNAP 32 gy	40 mm x 21 mm x 11 mm	0.05 kg	UL94-V0 Plastic	4-Port 16-Pin 5mm Pitch
KVT-SNAP 40 gy	40 mm x 21 mm x 11 mm	0.05 kg	UL94-V0 Plastic	4-Port 16-Pin 5mm Pitch
KVT-SNAP 63 4 gy	40 mm x 21 mm x 11 mm	0.05 kg	UL94-V0 Plastic	4-Port 16-Pin 5mm Pitch

KVT-SNAP 63|1 gy



EAN

□□□ □
□□ □□□ □□

□□ □□□

45154
4251269311291
5
1
35 mm
□□(RAL 7035 □ □□)
70,5 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M63
63,4 mm
M63 × 1,5
11 mm
1 x KT □

icotek[®]
smart cable management