

BPK plastic blank plates

for screw assembly / IP64 / UL Type 12



BPK Blank plates seal cut-outs for standard 10-pole / 16-pole / 24-pole industrial connectors with protection rating up to IP64 / UL type 12.

Blank plates are mounted via screws.

IP54

IP64

UL TYPE
12

CE
US

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany

Specifications

IP rating (EN 60529)	IP54, IP64
UL Type (UL 50E)	UL Type 12
Material	Polypropylene Integrated sealing lip: Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 110 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & benefits

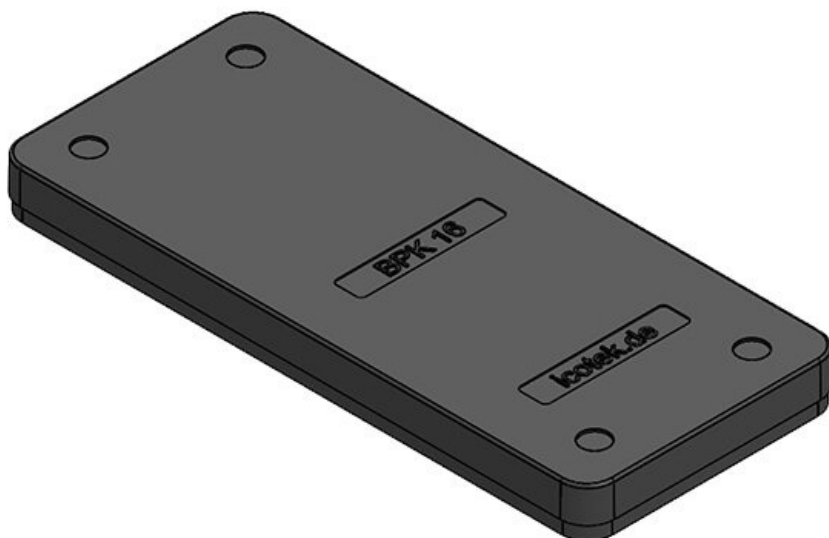
■ Integrated gasket

Product types & sizes

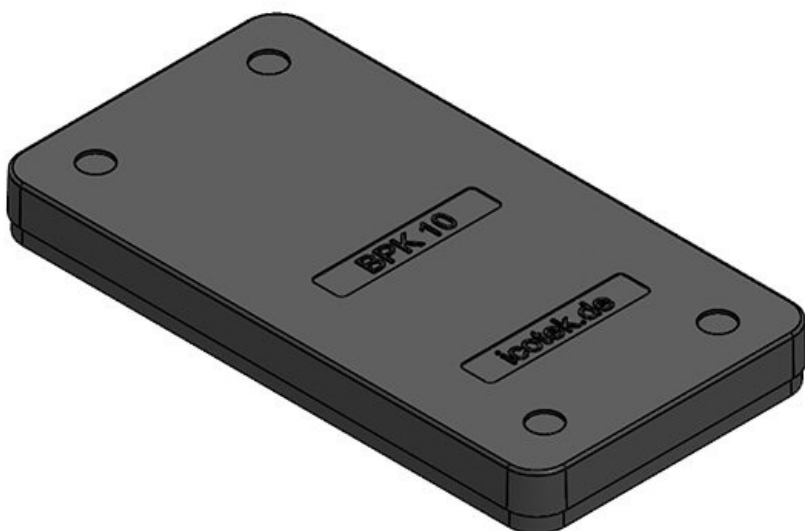
BPK 24



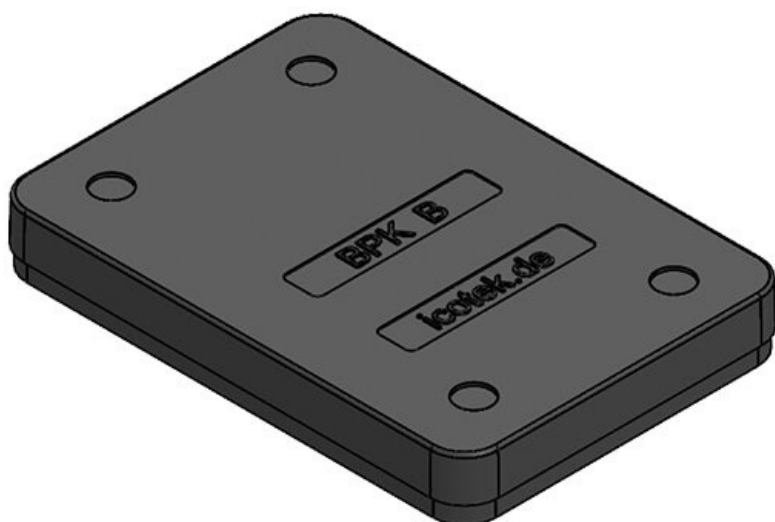
Part No.	42024	No. of screw	4
EAN	4251269307	holes	
	515	Diam. of screw	5,5 mm
Package quantity	10	holes	
Length	148 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	112 x 36 mm		

BPK 16

Part No.	42016	No. of screw	4
EAN	4251269307	holes	
	478	Diam. of screw	5,5 mm
Package quantity	10	holes	
Length	121 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	86 x 36 mm		

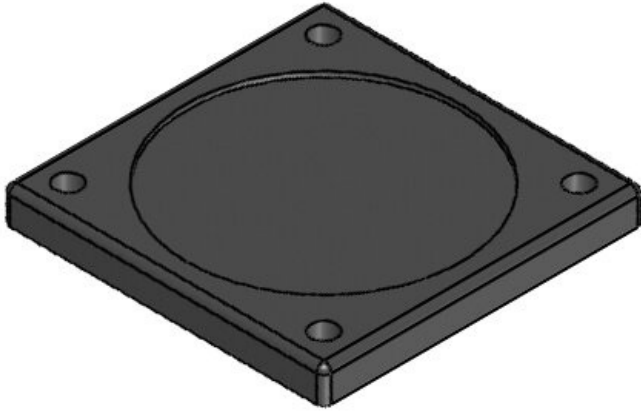
BPK 10

Part No.	42015	No. of screw	4
EAN	4251269307	holes	
	454	Diam. of screw	5,5 mm
Package quantity	10	holes	
Length	101 mm		
Width	53 mm		
Height	10 mm		
Cut-out size	65 x 36 mm		

BPK-B

Part No.	42010	No. of screw	4
EAN	4251269307	holes	
	393	Diam. of screw	5,5 mm
Package quantity	10	holes	
Length	76 mm		
Width	53 mm		
Height	10,3 mm		
Cut-out size	46 x 46 mm		

BPK-JFX



Part No.	42620	Diam. of screw	6,9 mm
EAN	4251269309	holes	
	045		
Package quantity	5		
Length	88 mm		
Width	88 mm		
Height	9 mm		
No. of screw holes	4		

icotek[®]
smart cable management